



加长六方阳螺纹接头

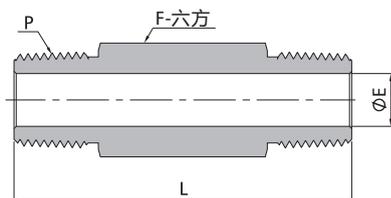

NPT 阳螺纹

P-NPT 尺寸	基本订购号	尺寸, mm			压力额定值 psig (bar)	
		L	F	E	316 不锈钢, 碳钢	黄铜
1/8	S-N2-38.1	38.1	11.1	4.8	10000 (689)	5000 (344)
1/8	S-N2-50.8	50.8	11.1	4.8	10000 (689)	5000 (344)
1/8	S-N2-63.5	63.5	11.1	4.8	10000 (689)	5000 (344)
1/8	S-N2-76.2	76.2	11.1	4.8	10000 (689)	5000 (344)
1/4	S-N4-38.1	38.1	14.3	7.1	8000 (551)	4000 (275)
1/4	S-N4-50.8	50.8	14.3	7.1	8000 (551)	4000 (275)
1/4	S-N4-63.5	63.5	14.3	7.1	8000 (551)	4000 (275)
1/4	S-N4-76.2	76.2	14.3	7.1	8000 (551)	4000 (275)
1/4	S-N4-101.6	101.6	14.3	7.1	8000 (551)	4000 (275)
3/8	S-N6-38.1	38.1	17.5	9.7	7800 (537)	3900 (268)
3/8	S-N6-50.8	50.8	17.5	9.7	7800 (537)	3900 (268)
3/8	S-N6-63.5	63.5	17.5	9.7	7800 (537)	3900 (268)
3/8	S-N6-76.2	76.2	17.5	9.7	7800 (537)	3900 (268)
3/8	S-N6-101.6	101.6	17.5	9.7	7800 (537)	3900 (268)
1/2	S-N8-50.8	50.8	22.2	11.9	7700 (530)	3800 (261)
1/2	S-N8-76.2	76.2	22.2	11.9	7700 (530)	3800 (261)
1/2	S-N8-101.6	101.6	22.2	11.9	7700 (530)	3800 (261)
1/2	S-N8-152.4	152.4	22.2	11.9	7700 (530)	3800 (261)
3/4	S-N12-50.8	50.8	27.0	15.7	7300 (502)	3600 (248)
3/4	S-N12-76.2	76.2	27.0	15.7	7300 (502)	3600 (248)
3/4	S-N12-101.6	101.6	27.0	15.7	7300 (502)	3600 (248)
1	S-N16-76.2	76.2	34.9	22.4	5300 (365)	2600 (179)
1	S-N16-101.6	101.6	34.9	22.4	5300 (365)	2600 (179)

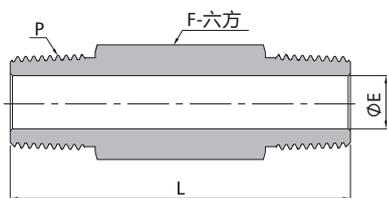

ISO 锥形阳螺纹

P-RT 尺寸	基本订购号	尺寸, mm			压力额定值 psig (bar)	
		L	F	E	316 不锈钢, 碳钢	黄铜
1/8	S-RT2-38.1	38.1	11.1	4.8	10000 (689)	5000 (344)
1/8	S-RT2-50.8	50.8	11.1	4.8	10000 (689)	5000 (344)
1/8	S-RT2-63.5	63.5	11.1	4.8	10000 (689)	5000 (344)
1/8	S-RT2-76.2	76.2	11.1	4.8	10000 (689)	5000 (344)
1/4	S-RT4-38.1	38.1	14.3	7.1	8000 (551)	4000 (275)
1/4	S-RT4-50.8	50.8	14.3	7.1	8000 (551)	4000 (275)
1/4	S-RT4-63.5	63.5	14.3	7.1	8000 (551)	4000 (275)
1/4	S-RT4-76.2	76.2	14.3	7.1	8000 (551)	4000 (275)
1/4	S-RT4-101.6	101.6	14.3	7.1	8000 (551)	4000 (275)
3/8	S-RT6-38.1	38.1	17.5	9.7	7800 (537)	3900 (268)
3/8	S-RT6-50.8	50.8	17.5	9.7	7800 (537)	3900 (268)
3/8	S-RT6-63.5	63.5	17.5	9.7	7800 (537)	3900 (268)
3/8	S-RT6-76.2	76.2	17.5	9.7	7800 (537)	3900 (268)
3/8	S-RT6-101.6	101.6	17.5	9.7	7800 (537)	3900 (268)
1/2	S-RT8-50.8	50.8	22.2	11.9	7700 (530)	3800 (261)
1/2	S-RT8-76.2	76.2	22.2	11.9	7700 (530)	3800 (261)
1/2	S-RT8-101.6	101.6	22.2	11.9	7700 (530)	3800 (261)
1/2	S-RT8-152.4	152.4	22.2	11.9	7700 (530)	3800 (261)
3/4	S-RT12-50.8	50.8	27.0	15.7	7300 (502)	3600 (248)
3/4	S-RT12-76.2	76.2	27.0	15.7	7300 (502)	3600 (248)
3/4	S-RT12-101.6	101.6	27.0	15.7	7300 (502)	3600 (248)
1	S-RT16-76.2	76.2	34.9	22.4	5300 (365)	2600 (179)
1	S-RT16-101.6	101.6	34.9	22.4	5300 (365)	2600 (179)