


阴螺纹45°弯头

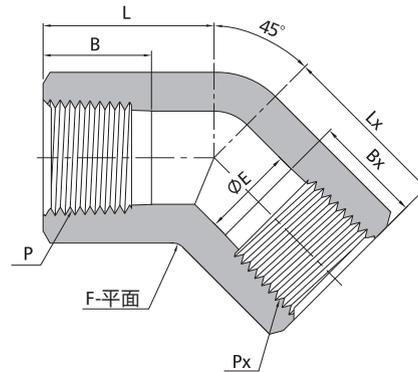

NPT 阴螺纹

P-NPT 尺寸	Px-NPT 尺寸	基本订购号	尺寸, mm						压力额定值 psig (bar)	
			L	F	B	E	Lx	Bx	316 不锈钢, 碳钢	黄铜
1/16	1/16	R-FN1	16.8	11.1	9.9	4.8	16.8	9.9	6700 (460)	3300 (227)
1/8	1/16	R-FN2FN1	20.2	12.7	10.4	4.8	20.2	9.9	6200 (427)	3100 (213)
1/8	1/8	R-FN2	20.2	12.7	10.4	7.1	20.2	10.4	6200 (427)	3100 (213)
1/4	1/8	R-FN4FN2	25.4	17.5	15.0	7.1	25.4	10.4	7200 (496)	3600 (248)
1/4	1/4	R-FN4	25.4	17.5	15.0	10.4	25.4	15.0	7200 (496)	3600 (248)
3/8	3/8	R-FN6	27.0	20.6	15.0	12.7	27.0	15.0	5600 (385)	2800 (192)
1/2	1/2	R-FN8	32.0	25.4	19.8	15.7	32.0	19.8	5600 (385)	2800 (192)
3/4	3/4	R-FN12	34.5	31.8	20.6	22.4	34.5	20.6	5100 (351)	2500 (172)
1	1	R-FN16	46.0	42.9	25.4	22.4	46.0	25.4	6400 (440)	3200 (220)
1 1/4	1 1/4	R-FN20	43.2	50.8	25.4	27.7	43.2	25.4	3100 (213)	1600 (110)
1 1/2	1 1/2	R-FN24	46.0	63.5	27.7	34.0	46.0	27.7	5100 (351)	2500 (172)

ISO 锥形阴螺纹

P-RT 尺寸	Px-RT 尺寸	基本订购号	尺寸, mm						压力额定值 psig (bar)	
			L	F	B	E	Lx	Bx	316 不锈钢, 碳钢	黄铜
1/16	1/16	R-FR1	16.8	11.1	9.9	4.8	16.8	9.9	6700 (460)	3300 (227)
1/8	1/16	R-FR2FR1	20.2	12.7	10.4	4.8	20.2	9.9	6200 (427)	3100 (213)
1/8	1/8	R-FR2	20.2	12.7	10.4	7.1	20.2	10.4	6200 (427)	3100 (213)
1/4	1/8	R-FR4FR2	25.4	17.5	15.0	7.1	25.4	10.4	7200 (496)	3600 (248)
1/4	1/4	R-FR4	25.4	17.5	15.0	10.4	25.4	15.0	7200 (496)	3600 (248)
3/8	3/8	R-FR6	27.0	20.6	15.0	12.7	27.0	15.0	5600 (385)	2800 (192)
1/2	1/2	R-FR8	32.0	25.4	19.8	15.7	32.0	19.8	5600 (385)	2800 (192)
3/4	3/4	R-FR12	34.5	31.8	20.6	22.4	34.5	20.6	5100 (351)	2500 (172)
1	1	R-FR16	46.0	42.9	25.4	22.4	46.0	25.4	6400 (440)	3200 (220)
1 1/4	1 1/4	R-FR20	43.2	50.8	25.4	27.7	43.2	25.4	3100 (213)	1600 (110)
1 1/2	1 1/2	R-FR24	46.0	63.5	27.7	34.0	46.0	27.7	5100 (351)	2500 (172)