


阳螺纹三通

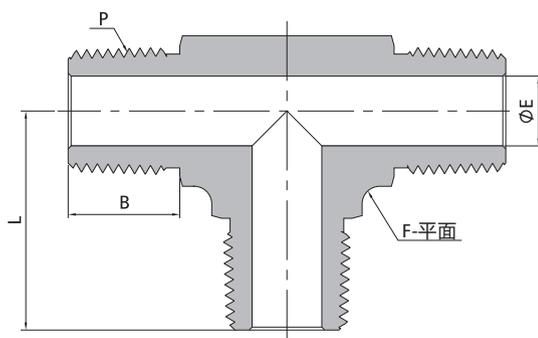

NPT 阳螺纹

P-NPT 尺寸	基本订购号	尺寸, mm				压力额定值 psig (bar)	
		L	F	B	E	316 不锈钢, 碳钢	黄铜
1/16	T-N1	18.3	9.5	9.7	3.0	11000 (757)	5500 (378)
1/8	T-N2	22.4	11.1	9.7	4.8	10000 (689)	5000 (344)
1/4	T-N4	26.7	12.7	14.2	7.1	8000 (551)	4000 (275)
3/8	T-N6	29.7	17.5	14.2	9.6	7800 (537)	3900 (268)
1/2	T-N8	36.8	20.6	19.1	11.9	7700 (530)	3800 (261)
3/4	T-N12	42.4	27.0	19.1	15.7	7300 (502)	3600 (248)
1	T-N16	49.3	34.9	23.9	22.4	5300 (365)	2600 (179)
1 1/4	T-N20	56.4	42.9	23.9	27.7	6000 (410)	3000 (200)
1 1/2	T-N24	67.1	47.6	26.2	34.0	5000 (344)	2500 (172)

ISO 锥形阳螺纹

P-RT 尺寸	基本订购号	尺寸, mm				压力额定值 psig (bar)	
		L	F	B	E	316 不锈钢, 碳钢	黄铜
1/16	T-RT1	18.3	9.5	9.7	3.0	11000 (757)	5500 (378)
1/8	T-RT2	22.4	11.1	9.7	4.8	10000 (689)	5000 (344)
1/4	T-RT4	26.7	12.7	14.2	7.1	8000 (551)	4000 (275)
3/8	T-RT6	29.7	17.5	14.2	9.7	7800 (537)	3900 (268)
1/2	T-RT8	36.8	20.6	19.1	11.9	7700 (530)	3800 (261)
3/4	T-RT12	42.4	27.0	19.1	15.7	7300 (502)	3600 (248)
1	T-RT16	49.3	34.9	23.9	22.4	5300 (365)	2600 (179)
1 1/4	T-RT20	56.4	42.9	23.9	27.7	6000 (410)	3000 (200)
1 1/2	T-RT24	67.1	47.6	26.2	34.0	5000 (344)	2500 (172)