


## 支管阳螺纹三通

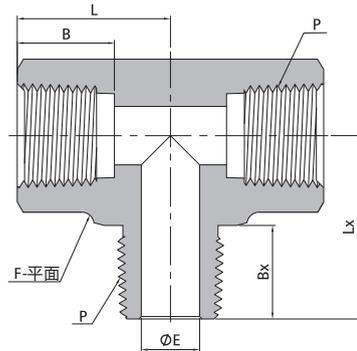

## NPT 螺纹

P-NPT 尺寸	基本订购号	尺寸, mm						压力额定值 psig (bar)	
		L	F	E	B	Lx	Bx	316 不锈钢, 碳钢	黄铜
1/16	T-FN1FN1N1	21.8	11.1	3.0	9.9	18.3	9.7	9200 (633)	4600 (316)
1/8	T-FN2FN2N2	26.4	12.7	4.8	10.4	22.1	9.7	6200 (427)	3100 (213)
1/4	T-FN4FN4N4	29.7	17.5	7.1	15.0	29.7	14.2	7200 (496)	3600 (248)
3/8	T-FN6FN6N6	36.1	20.6	9.6	15.0	32.0	14.2	5600 (385)	2800 (192)
1/2	T-FN8FN8N8	39.6	25.4	11.9	19.8	39.6	19.1	5600 (385)	2800 (192)
3/4	T-FN12FN12N12	48.8	31.8	15.7	20.6	42.4	19.1	5100 (351)	2500 (172)
1	T-FN16FN16N16	48.5	42.9	22.4	25.4	49.3	23.9	5300 (365)	2600 (179)

## ISO 锥形螺纹

P-RT 尺寸	基本订购号	尺寸, mm						压力额定值 psig (bar)	
		L	F	E	B	Lx	Bx	316 不锈钢, 碳钢	黄铜
1/16	T-FR1FR1RT1	21.8	11.1	3.0	9.9	18.3	9.7	9200 (633)	4600 (316)
1/8	T-FR2FR2RT2	26.4	12.7	4.8	10.4	22.1	9.7	6200 (427)	3100 (213)
1/4	T-FR4FR4RT4	29.7	17.5	7.1	15.0	29.7	14.2	7200 (496)	3600 (248)
3/8	T-FR6FR6RT6	36.1	20.6	9.7	15.0	32.0	14.2	5600 (385)	2800 (192)
1/2	T-FR8FR8RT8	39.6	25.4	11.9	19.8	39.6	19.1	5600 (385)	2800 (192)
3/4	T-FR12FR12RT12	48.8	31.8	15.7	20.6	42.4	19.1	5100 (351)	2500 (172)
1	T-FR16FR16RT16	48.5	42.9	22.4	25.4	49.3	23.9	5300 (365)	2600 (179)